

DRILLFLEX 6

A specially designed rope for drilling line duties, Drillflex 6 is flexible, resistant to abrasion, and has a very stable construction.

Deteriorating Forces - abrasion, drum / sheave wear fatigue; crushing forces from multi-layer winding on drum; and shock load.

Properties required - flexibility; abrasion resistance; stable construction to absorb crushing forces.




BRUNTON
WIRE ROPES
THE SPECIALIST



DRILLFLEX 6

Constructions 6x19S, 6x26SW, 6x31SW	Core Independent wire rope core	Range 26mm - 58mm	Rope grade EIPS / EEIPS	MBF 460 - 2420 kN
---	---	-----------------------------	-----------------------------------	-----------------------------

Typical applications
Drilling rigs ▪ Well servicing

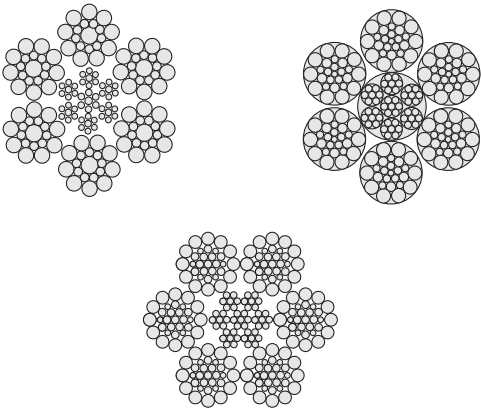

Nominal Rope Diameter		Approximate Mass		Minimum Breaking Force			
in.	mm	lb/ft	kg/m	EIPS		EEIPS	
				MT	kN	MT	kN
1	26	1.85	2.75	46.9	460	51.6	506
1 1/8	29	2.34	3.48	58.9	578	64.9	636
1 1/4	32	2.89	4.30	72.5	711	79.7	782
1 3/8	35	3.49	5.19	87.1	854	96.2	943
1 1/2	38	4.16	6.19	103	1010	113	1110
1 5/8	42	4.88	7.26	119	1170	133	1300
1 3/4	45	5.66	8.42	139	1360	153	1500
1 7/8	48	6.49	9.66	158	1550	174	1710
2.0	52	7.39	11.0	179	1760	197	1930
2 1/8	54	8.34	12.4	201	1970	220	2160
2 1/4	58	9.35	13.9	224	2200	247	2420

Note: The Wire Rope conforms to the applicable sections of API Specification 9A.



Get in touch with us

Write to us at contact@bsme.uae

To send us a detailed enquiry

[CLICK HERE →](#)

Use our rope selector to find the right rope

[CLICK HERE →](#)

برنتن وایر راپس فز ک ح

BW
Brunton Wire
Ropes FZCo.

P.O. BOX 17491, JEBEL ALI FREE ZONE, DUBAI, UAE

PH.: + 9714 8838755, + 971 50 9537280, + 971 50 177 5929, + 971 50 450 3717

FAX: + 9714 8838152 | E-MAIL: wireropes@bsme-uae.com, sm@bsme-uae.com, bmall@bsme-uae.com

an  **usha martin** Group company